

Package Contents:



WatchNET Products are subject to continuous changes and improvements, information on this document is subjected to change without prior notice.

2013 WatchNET Inc. © All Rights Reserved

* Not included/sold separately.



PoE IP Cameras

Connecting Your ENC-04



Power ON/OFF

VGA and/or HDMI*

Router*

LAN / WAN
Free DDNS
www.dvrid.com

Windows or MAC Connection*

When first booting up the NVR, Start-up Wizard will initiate. Clicking "next step" will start the Wizard.

Cancel to exit

Use the mouse to navigate thru the setup




Step 1

Login
Systems Default
Username: admin
Password: 1234



Step 2

System Settings
Adjust the time and date. Click "Save" before moving to the next step.

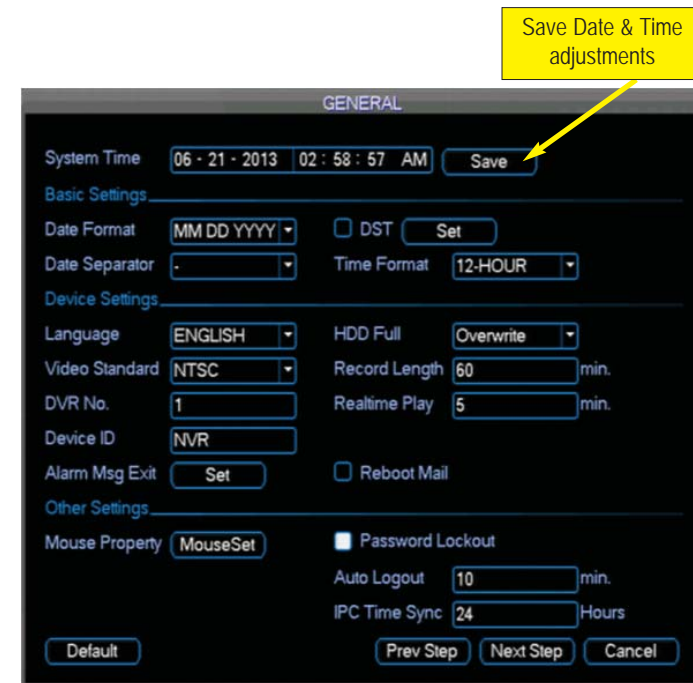

Save Date & Time adjustments

Step 3

Network
Change the default network to match the local network. Ask the network administrator for the proper IP address, Gateway and Subnet Mask.

Click Next Step when done



Step 4


Remote Device
MPIX cameras will auto-enroll, will be assigned an IP and camera number
Defaults:
Cam 1 will be assigned to 10.1.1.65
Cam 2 will be assigned to 10.1.1.66
Cam 3 will be assigned to 10.1.1.67
Cam 4 will be assigned to 10.1.1.68



Step 5

Recording Schedule
User can choose what the NVR records. Normal, Alarm, Motion or all events

By default all NVRs are set to record motion 24/7

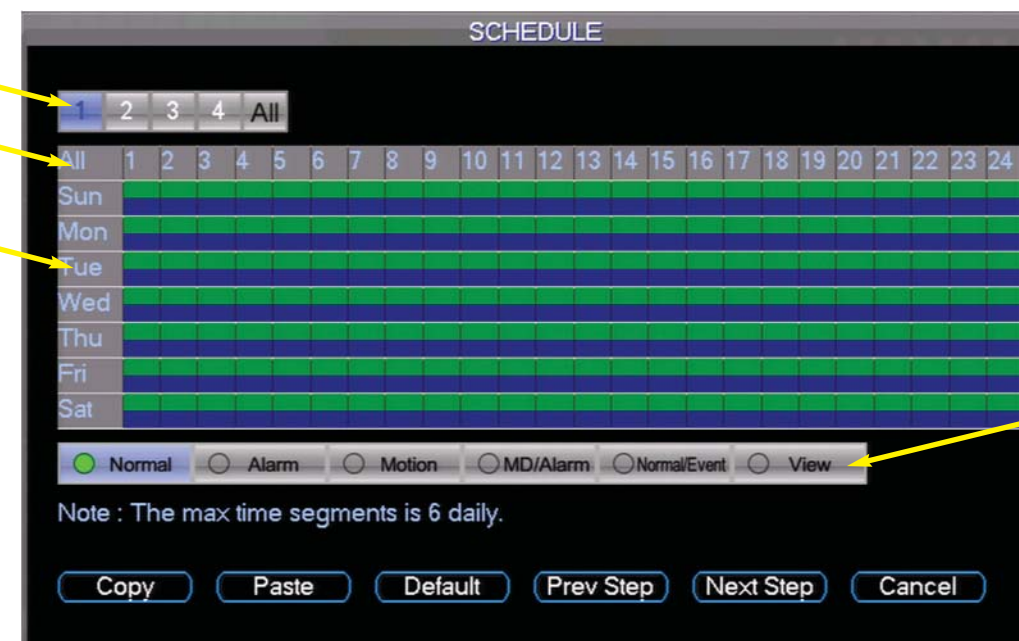

Camera Number

Hours of the day

Days of the week

Recording Color Codes

- Normal
- Alarm
- Motion
- MD/Alarm
- Normal/Event
- View

Click Next Step and Close the Wizard.

Now the system is setup and ready for recording.