


“Installation as Easy as **1** **2** **3**”

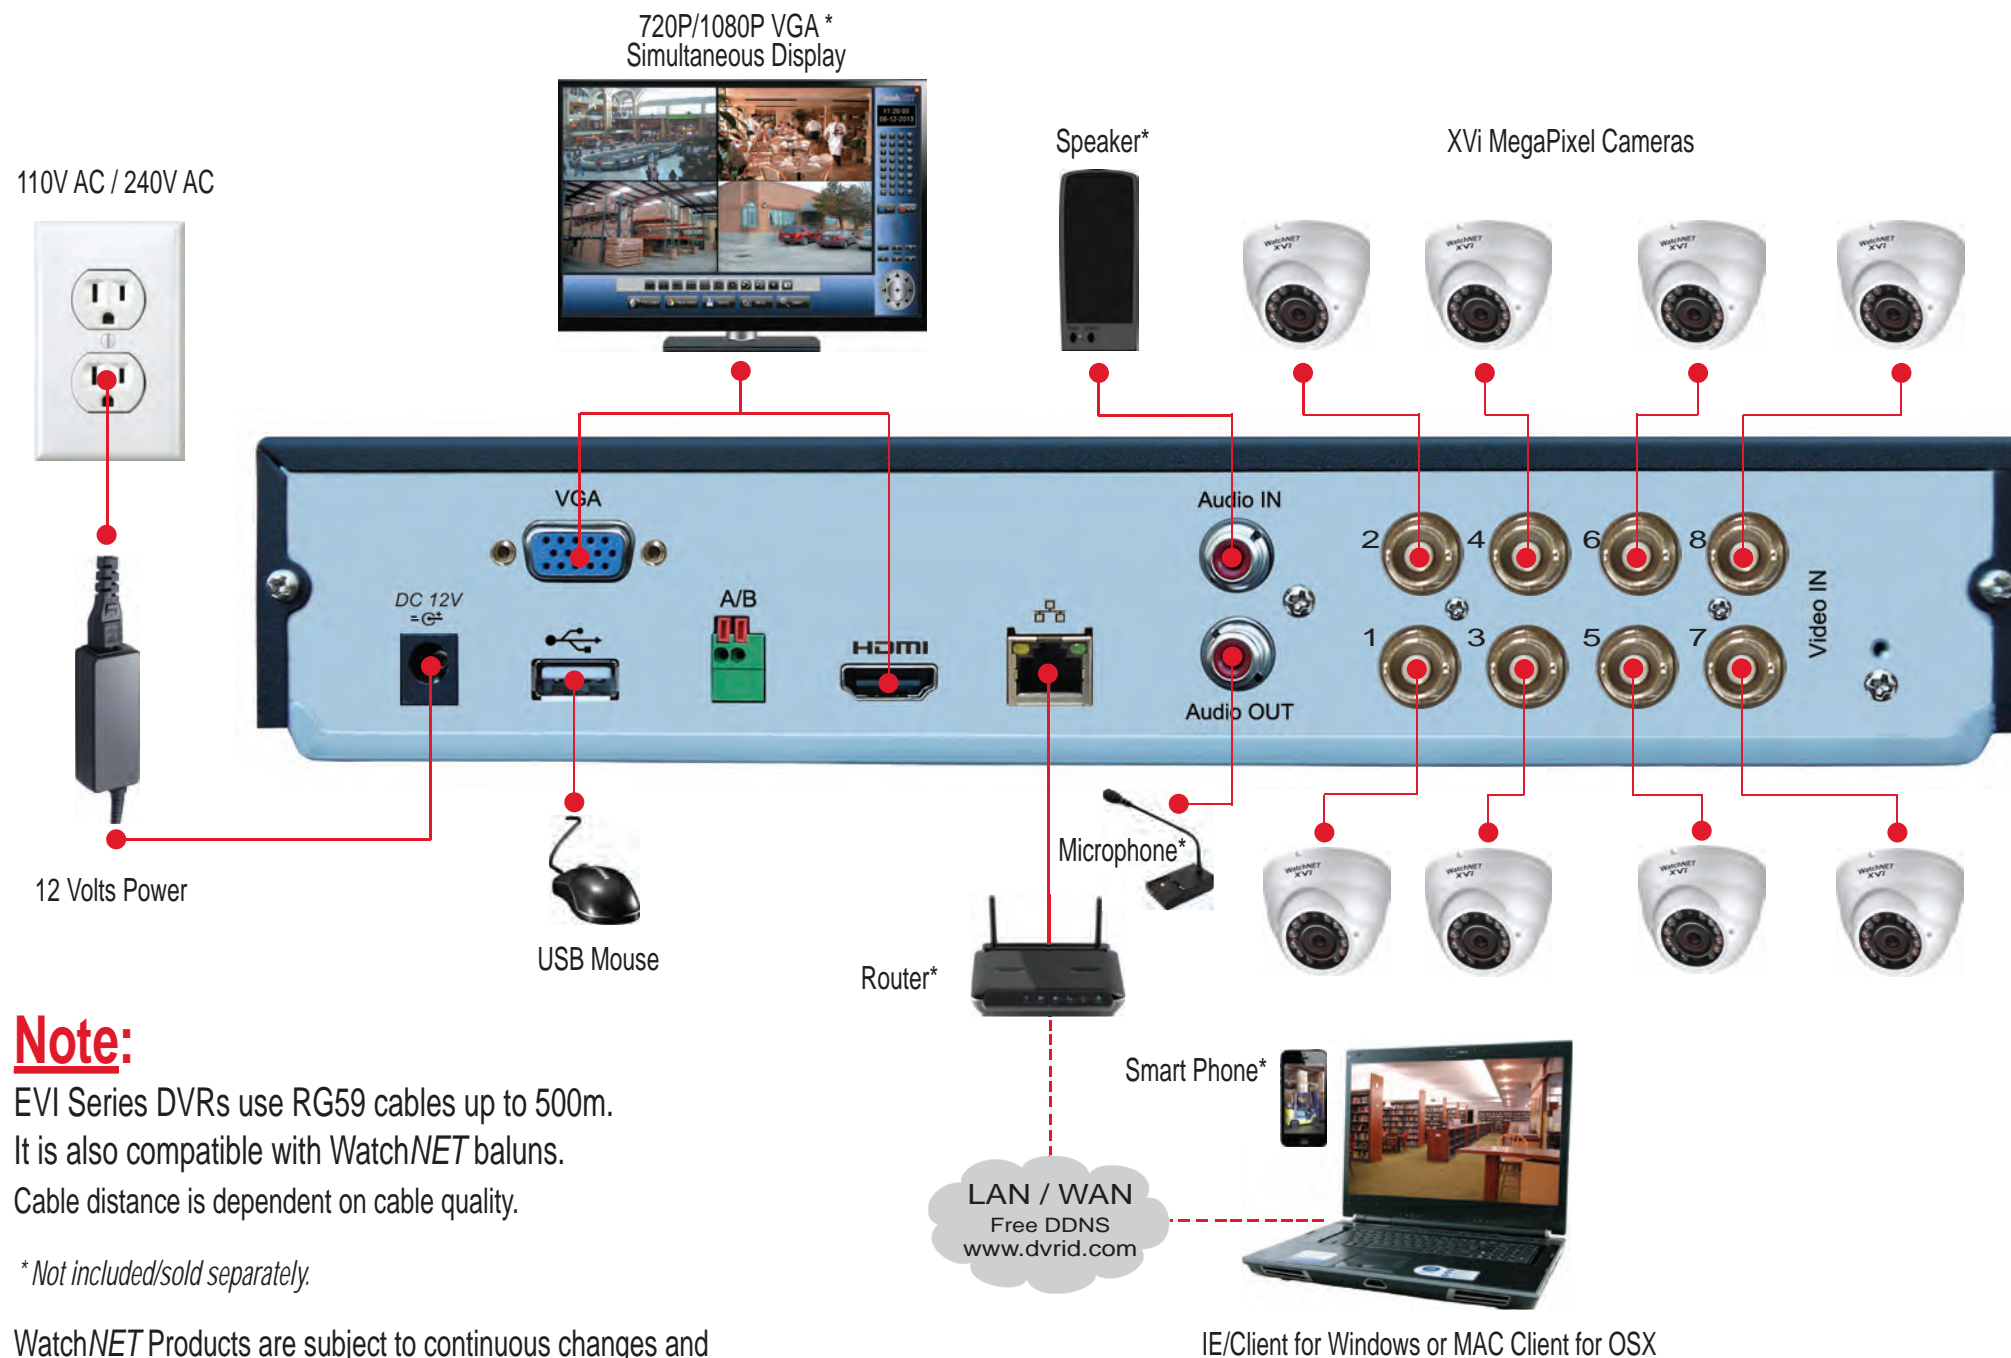

Note:
EVI Series DVRs use RG59 cables up to 500m.
It is also compatible with WatchNET baluns.
Cable distance is dependent on cable quality.

** Not included/sold separately.*

WatchNET Products are subject to continuous changes and improvements, information on this document is subjected to change without prior notice.

Connecting Your EVI DVR



WatchNET CLOUD





When first booting up the DVR, Password change Wizard will initiate. Put the old password "1234" and create a new password. Click "OK" to continue.

NOTE: Please remember and store your password, manufacturer will not be responsible for lost passwords.


Cancel to exit and keep the old password.

Use the mouse to navigate thru the setup

Step 2

System Settings

Click "Date & Time" tab to adjust the Date & Time. Click "Save" and then click "Apply" to move to the next step. Click "General" tab and then click "Next Step".

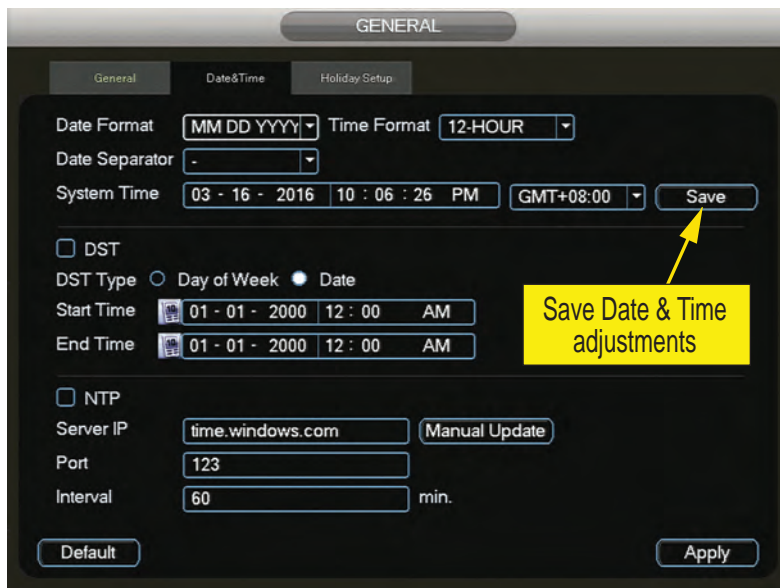

Step 1

Login
Systems Default
Username: admin
Password: 1234



Step 3

Set Recording Schedule


user can choose what the DVR records. Normal, Alarm, Motion or all events

By default all DVRs are set to record motion detection 24/7

Camera Number

Hours of the day

Days of the week

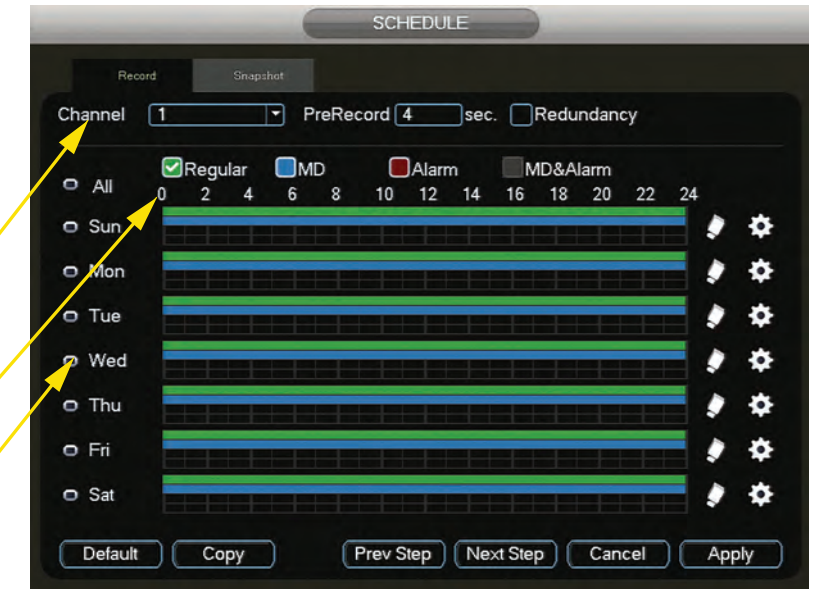


Step 4

Network

Change the default network to match the local network. Ask the network administrator for the proper IP address, Gateway and Mask.

Click Next Step & Close the Wizard.

Now the system is setup and ready for recording.

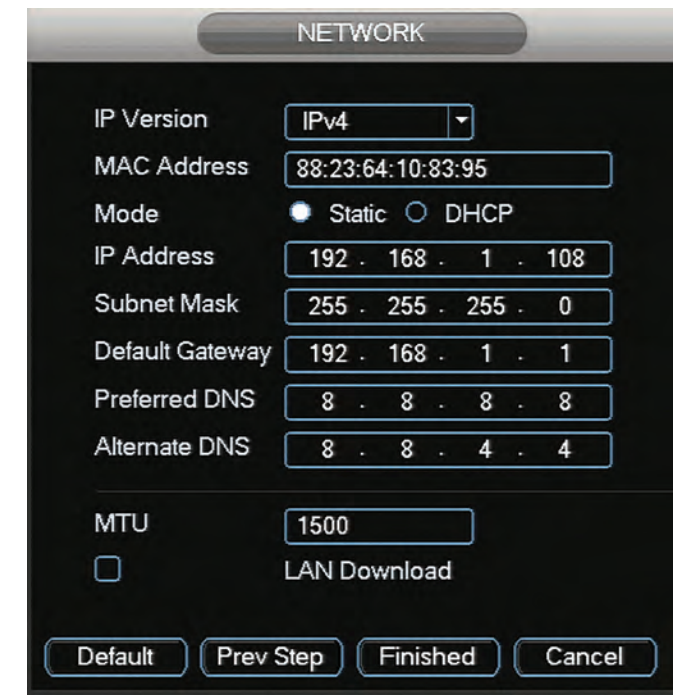

QUICK TIPS

- To switch between monitor resolution 720p/1080p press and hold Shift Key on front panel for 5 seconds.
- XVI PTZ Cameras work on coax cable or UTP for zoom/focus and pan/tilt control

